





LOW VOLTAGE


DC24V OPERATED









### **Installation Drawing**

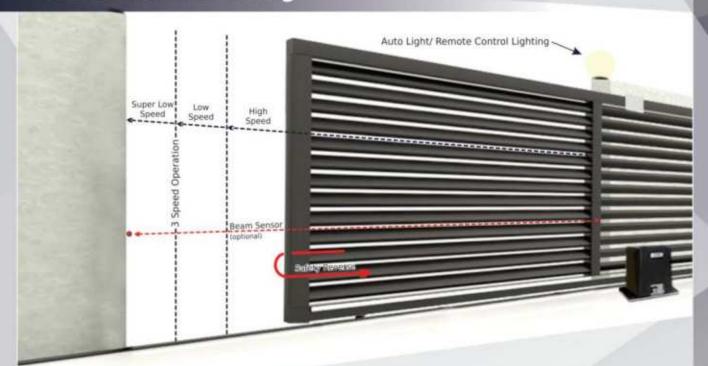



#### Dimension (mm) :-



#### **■ LEGEND**

- 1. Electronic Control Panel
- 2. Bencore Motor
- 3. Backup Battery
- 4. Power Transformer
- 5. Grease Type Gear Box
- 6. Pinion Gear

## **Specifications Chart**

### **SLIDING GATE OPERATOR M800 M4P120**

Operating Voltage	DC24V for normal speed DC12V for chushioning speed	
Max. Output Power	200W	250W
Max. Weight Of Gate	800kg	1200kg
Max. Length Of Gate	10 meter	
DSPC Device	Counter Sensor	
Lubrication	Grease Type   Alloy Base	
Safety Cluth	Electronic current sensing	
Backup Battery	12V 7AH	
Safety Barrier	Infrared beam sensor ( Optional)	
Main Supply	AC110V/ 220V, 60Hz/ 50Hz	
Electronic Controller	Microcomputer baesd	
Remote Controller	UHF Digital PWM type	
Temperature	0° c to +80° c	

# BENCORE

As good as its get

Powered by Casa Asia

Some changes may have happened to the product after this brochure is printed. The appearance and feature of the actual product may be slightly different from the illustration.

reserves the right to make technical changes to the product without notice.